

MUELLER ENCODER EIGHT (ME-8)



Features

APPLICATIONS: The Mueller Encoder Eight register (ME-8) is available for use on current Mueller Systems positive displacement meters in 5/8" through 2" sizes. The Mueller Encoder Eight register provides granular data for use in the latest AMR and AMI applications while the eight wheel visual display provides visual verification that aids in the detection of leaks and backflow.

The Mueller Encoder Eight register provides eight digits of visual resolution and up to 8 digits of electronic resolution for outstanding granularity when used in conjunction with current Mueller Systems AMR and AMI systems. Granularity of data permits customers to capture maximum revenue and be proactive in leak detection and resource conservation. Mechanical meter technology and electromechanical register design provide a proven and time tested solution for water utility needs.

The display provides 5/16" high, color contrasted odometer wheels for easy visual verification of radio frequency transmissions or field testing. The unique, never duplicated ten digit serial number on the Mueller Encoder Eight register housing identifies it as the basis for all systems communication. The register face plate and housing provide visual information specific to the registration units, model, size, date of manufacture, and billing units, to provide verifiable and retrievable data in the event it is required.

CONFORMANCE TO STANDARDS: Mueller Encoder Eight register complies with AWWA requirements for odometer wheel height as well as the American Standard Code for Information Interchange or ASCII.

CONSTRUCTION: Mueller Systems utilizes a UV stable, molded enclosure and lid made of thermoplastic to permanently house the ME-8 register components. The heat treated, tempered glass lens resists years of punishment. A variety of wired AMR/AMI options as well as touch pads are available.

The Mueller Encoder Eight register is compatible with all bayonet style locking mechanisms offered on Mueller Systems positive displacement meters. The register is tamper protected by the unique Mueller Systems locking pin. The register can be replaced without removing the meter from the service line when required due to vandalism or damage.

OPERATION: The Mueller Encoder Eight register detects the rotation of the drive magnet incorporated into the meter measuring element of the positive displacement meter. Light tubes inside the register capture the true position of all eight odometer wheels eliminating the possibility of odometer wheel errors.

When interrogated by a Mueller Systems AMR/AMI device, the Mueller Encoder Eight register communicates the unique ten digit serial number and up to an eight digit electronic reading in ACSII format where it can be recorded and maintained within the reporting structure of the AMR/AMI system. In the event that field testing is required, the high resolution test wheel provides excellent test resolution for all 5/8" through 2" positive displacement meters.



Mueller Encoder Eight (ME-8)


MAINTENANCE: The Mueller Encoder Eight register is designed and manufactured to provide a 20 year service life with virtually no maintenance required. Register lids are available as replacement components in the event of vandalism or the need for meter retrofits.

Materials and Specifications


MODEL	Mueller Encoder Eight Register (ME-8)
REGISTER TYPE	Absolute Encoder Register
SIZES	All 5/8" through 2" Positive Displacement Meters All current 5/8" through 2" Positive Displacement Meters Meter models 420, 435, 452 562, 572
STANDARDS	Manufactured and tested to meet or exceed all applicable parts of ANSI/AWWA C707 Standard and the American Standard Code for Information Interchange (ASCII)
TEMPERATURE OPERATING RANGE	14°F (-10°C) to 176°F (80°C)
STORAGE TEMPERATURE RANGE	-40°F (-40°C) to 185°F (85°C)
CONNECTION OPTIONS	5' or 25' Nicor Connector, 5' or 25' Itron In-Line Connector, 5' or 25' wired Hot Rod, or Mi.Node with factory potted connections
MATERIALS	Register housing and lid - thermoplastic; Register lens - glass; Display - 8 digit visual resolution and up to 8 digit electronic resolution with Mueller Systems AMR/AMI systems
AMR/AMI COMPATIBILITY	Mueller Systems Hot Rod AMR system, Mi.Net AMI system, MegaNet AMI system, and other AMR/AMI systems that can utilize the Mueller Systems standard encoder protocol output. Touch pad compatible.

ME-8

METER FACE PLATE - GALLONS

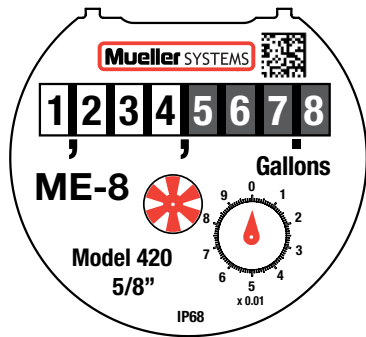


MODEL 420, 435, 452

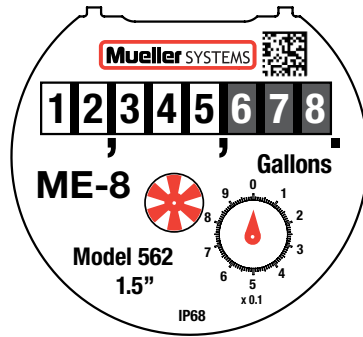


MODEL 562, 572

METER FACE PLATE - CUBIC FEET

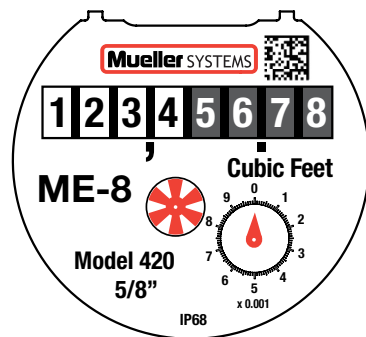


MODEL 420, 435, 452

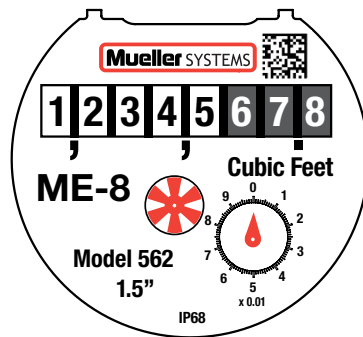


MODEL 562, 572

METER FACE PLATE - CUBIC METERS

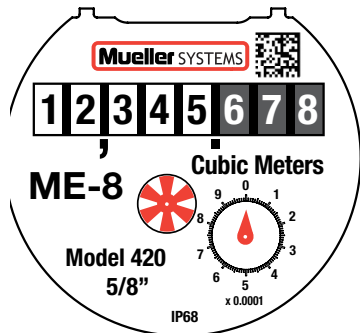

MODEL 420, 435, 452

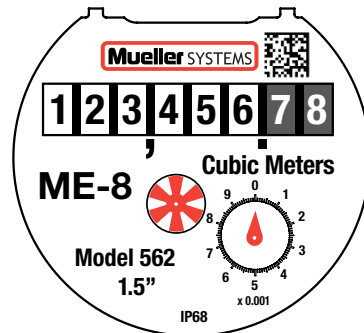

MODEL 562, 572

All Mueller Systems ME-8 registers are shipped displaying zeros for all odometer wheel values. Examples here are provided for illustration only.

Mueller Systems always recommends ME-8 registers are programmed for 8 wheel electronic resolution for the best leak and back flow detection possible